

MARINE ROPE

MAKING LIFE FUN ON THE WATER



Dock Line

NYLON DOUBLE BRAIDED DOCK LINE



PACKING CHOICE OF DOCK LINE



Feature

Core: 100% nylon (Polyamide),

8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"

Cover: 100% nylon (Polyamide),

16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"

Pre-spliced Eye: 12" eye for rope 3/8" and 1/2", 16" eye for rope 5/8"


White	Dia.	Length	Breaking Load
TFDL043815W	3/8"	15'	4000lb
TFDL043820W	3/8"	20'	4000lb
TFDL043825W	3/8"	25'	4000lb
TFDL041215W	1/2"	15'	4900lb
TFDL041220W	1/2"	20'	4900lb
TFDL041225W	1/2"	25'	4900lb
TFDL045820W	5/8"	20'	8700lb
TFDL045825W	5/8"	25'	8700lb
TFDL045835W	5/8"	35'	8700lb

Black	Dia.	Length	Breaking Load
TFDL043815BK	3/8"	15'	4000lb
TFDL043820BK	3/8"	20'	4000lb
TFDL043825BK	3/8"	25'	4000lb
TFDL041215BK	1/2"	15'	4900lb
TFDL041220BK	1/2"	20'	4900lb
TFDL041225BK	1/2"	25'	4900lb
TFDL045820BK	5/8"	20'	8700lb
TFDL045825BK	5/8"	25'	8700lb
TFDL045835BK	5/8"	35'	8700lb

Blue	Dia.	Length	Breaking Load
TFDL043815BL	3/8"	15'	4000lb
TFDL043825BL	3/8"	20'	4000lb
TFDL043825BL	3/8"	25'	4000lb
TFDL041215BL	1/2"	15'	4900lb
TFDL041225BL	1/2"	20'	4900lb
TFDL041225BL	1/2"	25'	4900lb
TFDL045825BL	5/8"	20'	8700lb
TFDL045825BL	5/8"	25'	8700lb
TFDL045835BL	5/8"	35'	8700lb

White/Gold	Dia.	Length	Breaking Load
TFDL043815G	3/8"	15'	4000lb
TFDL043820G	3/8"	20'	4000lb
TFDL043825G	3/8"	25'	4000lb
TFDL041215G	1/2"	15'	4900lb
TFDL041220G	1/2"	20'	4900lb
TFDL041225G	1/2"	25'	4900lb
TFDL045820G	5/8"	20'	8700lb
TFDL045825G	5/8"	25'	8700lb
TFDL045835G	5/8"	35'	8700lb


NYLON DOUBLE BRAIDED DOCK LINE- REFLECTIVE TYPE



Night/Day



Black



Blue

Feature

Core: 100% nylon (Polyamide),
 8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"
 Cover: 100% nylon (Polyamide), with Reflective fleck all through the rope,
 16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"
 Pre-spliced Eye: 12" eye for rope 3/8" and 1/2", 16" eye for rope 5/8"

PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank



Blister

Black	Dia.	Length	Breaking Load
TFDL033815BK	3/8"	15'	4000lb
TFDL033825BK	3/8"	25'	4000lb
TFDL031215BK	1/2"	15'	4900lb
TFDL031225BK	1/2"	25'	4900lb
TFDL035825BK	5/8"	25'	8700lb
TFDL035835BK	5/8"	35'	8700lb

Blue	Dia.	Length	Breaking Load
TFDL033815BL	3/8"	15'	4000lb
TFDL033825BL	3/8"	25'	4000lb
TFDL031215BL	1/2"	15'	4900lb
TFDL031225BL	1/2"	25'	4900lb
TFDL035825BL	5/8"	25'	8700lb
TFDL035835BL	5/8"	35'	8700lb

NYLON 3 STRAND TWISTED DOCK LINE



White



Black



Navy

PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank



Blister

Feature

100% nylon (Polyamide)

3 strand twisted, classic structure for mooring rope

Pre-spliced Eye: 12" eye for rope 3/8" and 1/2", 16" eye for rope 5/8"

White	Dia.	Length	Breaking Load
TFDL013815W	3/8"	15'	3300lb
TFDL013820W	3/8"	20'	3300lb
TFDL013825W	3/8"	25'	3300lb
TFDL011215W	1/2"	15'	4400lb
TFDL011220W	1/2"	20'	4400lb
TFDL011225W	1/2"	25'	4400lb
TFDL015820W	5/8"	20'	7500lb
TFDL015825W	5/8"	25'	7500lb
TFDL015835W	5/8"	35'	7500lb

Black	Dia.	Length	Breaking Load
TFDL013815BK	3/8"	15'	3300lb
TFDL013820BK	3/8"	20'	3300lb
TFDL013825BK	3/8"	25'	3300lb
TFDL011215BK	1/2"	15'	4400lb
TFDL011220BK	1/2"	20'	4400lb
TFDL011225BK	1/2"	25'	4400lb
TFDL015820BK	5/8"	20'	7500lb
TFDL015825BK	5/8"	25'	7500lb
TFDL015835BK	5/8"	35'	7500lb

Navy	Dia.	Length	Breaking Load
TFDL013815N	3/8"	15'	3300lb
TFDL013825N	3/8"	20'	3300lb
TFDL013825N	3/8"	25'	3300lb
TFDL011215N	1/2"	15'	4400lb
TFDL011225N	1/2"	20'	4400lb
TFDL011225N	1/2"	25'	4400lb
TFDL015825N	5/8"	20'	7500lb
TFDL015825N	5/8"	25'	7500lb
TFDL015835N	5/8"	35'	7500lb

NYLON 8 PLAIT DOCK LINE



PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank

Feature

100% nylon (Polyamide)

8 Plait braid, classic structure for mooring rope

Pre-spliced Eye: 16" eye for rope 5/8", 20" eye for rope 3/4", 24" eye for rope 1"

White	Dia.	Length	Breaking Load
TFDL075825W	5/8"	25'	8700lb
TFDL075835W	5/8"	35'	8700lb
TFDL073425W	3/4"	25'	11000lb
TFDL073435W	3/4"	35'	11000lb
TFDL073450W	3/4"	50'	11000lb
TFDL071125W	1"	25'	20000lb
TFDL071135W	1"	35'	20000lb
TFDL071150W	1"	50'	20000lb

Black	Dia.	Length	Breaking Load
TFDL075825BK	5/8"	25'	8700lb
TFDL075835BK	5/8"	35'	8700lb
TFDL073425BK	3/4"	25'	11000lb
TFDL073435BK	3/4"	35'	11000lb
TFDL073450BK	3/4"	50'	11000lb
TFDL071125BK	1"	25'	20000lb
TFDL071135BK	1"	35'	20000lb
TFDL071150BK	1"	50'	20000lb

POLYESTER DOUBLE BRAIDED DOCK LINE



Feature

Core: 100% Polyester,
 8 strand braid for rope 10mm and 12mm, 12 strand braid for rope 14mm and thicker
 Cover: 100% Polyester, 16 strand double braid for rope 10mm and 12mm,
 24 strand double braid for rope 14mm and thicker
 Pre-spliced Eye: 30cm eye for rope 10mm and 12mm,
 40cm eye for rope 14mm and 16mm,
 50cm eye for rope 20mm, 60cm eye for rope 24mm

PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank


White	Dia.	Length	Breaking Load
TFDL051006W	10mm	6m	1460kg
TFDL051206W	12mm	6m	2060kg
TFDL051208W	12mm	8m	2060kg
TFDL051408W	14mm	8m	2750kg
TFDL051410W	14mm	10m	2750kg
TFDL051610W	16mm	10m	3670kg
TFDL051612W	16mm	12m	3670kg
TFDL052012W	20mm	12m	5510kg
TFDL052015W	20mm	15m	5510kg
TFDL052415W	24mm	15m	7800kg

Black	Dia.	Length	Breaking Load
TFDL051006B	10mm	6m	1460kg
TFDL051206B	12mm	6m	2060kg
TFDL051208B	12mm	8m	2060kg
TFDL051408B	14mm	8m	2750kg
TFDL051410B	14mm	10m	2750kg
TFDL051610B	16mm	10m	3670kg
TFDL051612B	16mm	12m	3670kg
TFDL052012B	20mm	12m	5510kg
TFDL052015B	20mm	15m	5510kg
TFDL052415B	24mm	15m	7800kg

Navy	Dia.	Length	Breaking Load
TFDL051006N	10mm	6m	1460kg
TFDL051206N	12mm	6m	2060kg
TFDL051208N	12mm	8m	2060kg
TFDL051408N	14mm	8m	2750kg
TFDL051410N	14mm	10m	2750kg
TFDL051610N	16mm	10m	3670kg
TFDL051612N	16mm	12m	3670kg
TFDL052012N	20mm	12m	5510kg
TFDL052015N	20mm	15m	5510kg
TFDL052415N	24mm	15m	7800kg



POLYESTER DOUBLE BRAIDED DOCK LINE- REFLECTIVE TYPE



Night/Day



Black



Blue

Feature

Core: 100% Polyester,

8 strand braid for rope 10mm and 12mm, 12 strand braid for rope 14mm and thicker

Cover: 100% Polyester, 16 strand double braid for rope 10mm and 12mm,

24 strand double braid for rope 14mm and thicker

Pre-spliced Eye: 30cm eye for rope 10mm and 12mm, 40cm eye for rope 14mm and 16mm,

50cm eye for rope 20mm, 60cm eye for rope 24mm

PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank

Black	Dia.	Length	Breaking Load
TFDL061006B	10mm	6m	1460kg
TFDL061206B	12mm	6m	2060kg
TFDL061208B	12mm	8m	2060kg
TFDL061408B	14mm	8m	2750kg
TFDL061410B	14mm	10m	2750kg
TFDL061610B	16mm	10m	3670kg
TFDL061612B	16mm	12m	3670kg
TFDL062012B	20mm	12m	5510kg
TFDL062015B	20mm	15m	5510kg
TFDL062415B	24mm	15m	7800kg

Navy	Dia.	Length	Breaking Load
TFDL061006N	10mm	6m	1460kg
TFDL061206N	12mm	6m	2060kg
TFDL061208N	12mm	8m	2060kg
TFDL061408N	14mm	8m	2750kg
TFDL061410N	14mm	10m	2750kg
TFDL061610N	16mm	10m	3670kg
TFDL061612N	16mm	12m	3670kg
TFDL062012N	20mm	12m	5510kg
TFDL062015N	20mm	15m	5510kg
TFDL062415N	24mm	15m	7800kg

POLYESTER 3 STRAND TWISTED DOCK LINE



White



Black



Navy

PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank

Feature

100% Polyester,

3 strand twisted, classic structure for mooring rope

Pre-spliced Eye: 30cm eye for rope 10mm and 12mm, 40cm eye for rope 14mm and 16mm,

50cm eye for rope 20mm, 60cm eye for rope 24mm

White	Dia.	Length	Breaking Load
TFDL021006W	10mm	6m	1460kg
TFDL021206W	12mm	6m	2060kg
TFDL021208W	12mm	8m	2060kg
TFDL021408W	14mm	8m	2750kg
TFDL021410W	14mm	10m	2750kg
TFDL021610W	16mm	10m	3670kg
TFDL021612W	16mm	12m	3670kg
TFDL022012W	20mm	12m	5510kg
TFDL022015W	20mm	15m	5510kg
TFDL022415W	24mm	15m	7800kg

Black	Dia.	Length	Breaking Load
TFDL021006B	10mm	6m	1460kg
TFDL021206B	12mm	6m	2060kg
TFDL021208B	12mm	8m	2060kg
TFDL021408B	14mm	8m	2750kg
TFDL021410B	14mm	10m	2750kg
TFDL021610B	16mm	10m	3670kg
TFDL021612B	16mm	12m	3670kg
TFDL022012B	20mm	12m	5510kg
TFDL022015B	20mm	15m	5510kg
TFDL022415B	24mm	15m	7800kg

Navy	Dia.	Length	Breaking Load
TFDL021006N	10mm	6m	1460kg
TFDL021206N	12mm	6m	2060kg
TFDL021208N	12mm	8m	2060kg
TFDL021408N	14mm	8m	2750kg
TFDL021410N	14mm	10m	2750kg
TFDL021610N	16mm	10m	3670kg
TFDL021612N	16mm	12m	3670kg
TFDL022012N	20mm	12m	5510kg
TFDL022015N	20mm	15m	5510kg
TFDL022415N	24mm	15m	7800kg

POLYESTER 8 PLAIT DOCK LINE



PACKING CHOICE OF DOCK LINE



Color Box



Bulk Hank

Feature

100% Polyester,
8 plait braid, classic structure for mooring rope
Pre-spliced Eye: 40cm eye for rope 16mm, 50cm eye for rope 20mm,
60cm eye for rope 24mm

White	Dia.	Length	Breaking Load
TFDL081610W	16mm	10m	3670kg
TFDL081612W	16mm	12m	3670kg
TFDL082012W	20mm	12m	5510kg
TFDL082015W	20mm	15m	5510kg
TFDL082415W	24mm	15m	7800kg

Black	Dia.	Length	Breaking Load
TFDL081610B	16mm	10m	3670kg
TFDL081612B	16mm	12m	3670kg
TFDL082012B	20mm	12m	5510kg
TFDL082015B	20mm	15m	5510kg
TFDL082415B	24mm	15m	7800kg

Navy	Dia.	Length	Breaking Load
TFDL081610N	16mm	10m	3670kg
TFDL081612N	16mm	12m	3670kg
TFDL082012N	20mm	12m	5510kg
TFDL082015N	20mm	15m	5510kg
TFDL082415N	24mm	15m	7800kg

Anchor Line

NYLON 3 STRAND TWISTED ANCHOR LINE



- Feature**
- 100% nylon (Polyamide)
 - 3 strand twisted, classic structure for mooring rope
 - Pre-spliced Eye with Stainless Steel 316 Thimble

White	Dia.	Length	Breaking Load
TFAL0138100W	3/8"	100'	3300lb
TFAL0138150W	3/8"	150'	3300lb
TFAL0138200W	3/8"	200'	3300lb
TFAL0112100W	1/2"	100'	4400lb
TFAL0112150W	1/2"	150'	4400lb
TFAL0112200W	1/2"	200'	4400lb
TFAL0112250W	1/2"	250'	4400lb
TFAL0158200W	5/8"	200'	7500lb
TFAL0158250W	5/8"	250'	7500lb

Black	Dia.	Length	Breaking Load
TFAL0138100B	3/8"	100'	3300lb
TFAL0138200B	3/8"	150'	3300lb
TFAL0138200B	3/8"	200'	3300lb
TFAL0112100B	1/2"	100'	4400lb
TFAL0112150B	1/2"	150'	4400lb
TFAL0112200B	1/2"	200'	4400lb
TFAL0112250B	1/2"	250'	4400lb
TFAL0158200B	5/8"	200'	7500lb
TFAL0158250B	5/8"	250'	7500lb

Navy	Dia.	Length	Breaking Load
TFAL0138100N	3/8"	100'	3300lb
TFAL0138150N	3/8"	150'	3300lb
TFAL0138200N	3/8"	200'	3300lb
TFAL0112100N	1/2"	100'	4400lb
TFAL0112150N	1/2"	150'	4400lb
TFAL0112200N	1/2"	200'	4400lb
TFAL0112250N	1/2"	250'	4400lb
TFAL0158200N	5/8"	200'	7500lb
TFAL0158250N	5/8"	250'	7500lb

NYLON DOUBLE BRAIDED ANCHOR LINE



Feature

Core: 100% nylon (Polyamide),
8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"
Cover: 100% nylon (Polyamide),
16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"
Pre-spliced Eye with Stainless Steel 316 Thimble

White with fleck	Dia.	Length	Breaking Load
TFAL0338100W	3/8"	100'	4000lb
TFAL0338150W	3/8"	150'	4000lb
TFAL0338200W	3/8"	200'	4000lb
TFAL0312100W	1/2"	100'	4900lb
TFAL0312150W	1/2"	150'	4900lb
TFAL0312200W	1/2"	200'	4900lb
TFAL0312250W	1/2"	250'	8700lb
TFAL0358200W	5/8"	200'	8700lb
TFAL0358250W	5/8"	250'	8700lb

Black	Dia.	Length	Breaking Load
TFAL0338100B	3/8"	100'	4000lb
TFAL0338150B	3/8"	150'	4000lb
TFAL0338200B	3/8"	200'	4000lb
TFAL0312100B	1/2"	100'	4900lb
TFAL0312150B	1/2"	150'	4900lb
TFAL0312200B	1/2"	200'	4900lb
TFAL0312250B	1/2"	250'	8700lb
TFAL0358200B	5/8"	200'	8700lb
TFAL0358250B	5/8"	250'	8700lb

White/Gold	Dia.	Length	Breaking Load
TFAL0338100G	3/8"	100'	4000lb
TFAL0338150G	3/8"	150'	4000lb
TFAL0338200G	3/8"	200'	4000lb
TFAL0312100G	1/2"	100'	4900lb
TFAL0312150G	1/2"	150'	4900lb
TFAL0312200G	1/2"	200'	4900lb
TFAL0312250G	1/2"	250'	8700lb
TFAL0358200G	5/8"	200'	8700lb
TFAL0358250G	5/8"	250'	8700lb

Navy	Dia.	Length	Breaking Load
TFAL0338100N	3/8"	100'	4000lb
TFAL0338150N	3/8"	150'	4000lb
TFAL0338200N	3/8"	200'	4000lb
TFAL0312100N	1/2"	100'	4900lb
TFAL0312150N	1/2"	150'	4900lb
TFAL0312200N	1/2"	200'	4900lb
TFAL0312250N	1/2"	250'	8700lb
TFAL0358200N	5/8"	200'	8700lb
TFAL0358250N	5/8"	250'	8700lb

POLYESTER 3 STRAND TWISTED ANCHOR LINE



Feature

100% Polyester

3 strand twisted, classic structure for mooring rope

Pre-spliced Eye with Stainless Steel 316 Thimble

White	Dia.	Length	Breaking Load
TFAL021230W	12mm	30m	2060kg
TFAL021206W	12mm	45m	2060kg
TFAL021208W	12mm	60m	2060kg
TFAL021408W	14mm	30m	2750kg
TFAL021410W	14mm	45m	2750kg
TFAL021610W	14mm	60m	2750kg
TFAL021612W	16mm	30m	3670kg
TFAL022012W	16mm	45m	3670kg
TFAL022015W	16mm	60m	3670kg

Black	Dia.	Length	Breaking Load
TFAL021230B	12mm	30m	2060kg
TFAL021206B	12mm	45m	2060kg
TFAL021208B	12mm	60m	2060kg
TFAL021408B	14mm	30m	2750kg
TFAL021410B	14mm	45m	2750kg
TFAL021610B	14mm	60m	2750kg
TFAL021612B	16mm	30m	3670kg
TFAL022012B	16mm	45m	3670kg
TFAL022015B	16mm	60m	3670kg

Navy	Dia.	Length	Breaking Load
TFAL021230N	12mm	30m	2060kg
TFAL021206N	12mm	45m	2060kg
TFAL021208N	12mm	60m	2060kg
TFAL021408N	14mm	30m	2750kg
TFAL021410N	14mm	45m	2750kg
TFAL021610N	14mm	60m	2750kg
TFAL021612N	16mm	30m	3670kg
TFAL022012N	16mm	45m	3670kg
TFAL022015N	16mm	60m	3670kg

POLYESTER DOUBLE BRAIDED ANCHOR LINE



Black



Navy

Feature

Core: 100% Polyester

8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"

Cover: 100% Polyester

16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"

Pre-spliced Eye with Stainless Steel 316 Thimble



White with fleck	Dia.	Length	Breaking Load
TFAL051230W	12mm	30m	2060kg
TFAL051206W	12mm	45m	2060kg
TFAL051208W	12mm	60m	2060kg
TFAL051408W	14mm	30m	2750kg
TFAL051410W	14mm	45m	2750kg
TFAL051610W	14mm	60m	2750kg
TFAL051612W	16mm	30m	3670kg
TFAL052012W	16mm	45m	3670kg
TFAL052015W	16mm	60m	3670kg

Black	Dia.	Length	Breaking Load
TFAL051230B	12mm	30m	2060kg
TFAL051206B	12mm	45m	2060kg
TFAL051208B	12mm	60m	2060kg
TFAL051408B	14mm	30m	2750kg
TFAL051410B	14mm	45m	2750kg
TFAL051610B	14mm	60m	2750kg
TFAL051612B	16mm	30m	3670kg
TFAL052012B	16mm	45m	3670kg
TFAL052015B	16mm	60m	3670kg

Navy	Dia.	Length	Breaking Load
TFAL051230N	12mm	30m	2060kg
TFAL051206N	12mm	45m	2060kg
TFAL051208N	12mm	60m	2060kg
TFAL051408N	14mm	30m	2750kg
TFAL051410N	14mm	45m	2750kg
TFAL051610N	14mm	60m	2750kg
TFAL051612N	16mm	30m	3670kg
TFAL052012N	16mm	45m	3670kg
TFAL052015N	16mm	60m	3670kg

Mooring Rope In Reel

NYLON 3 STRAND TWISTED ROPE

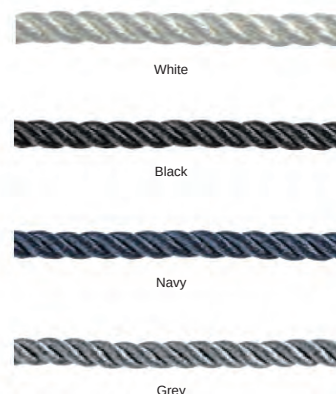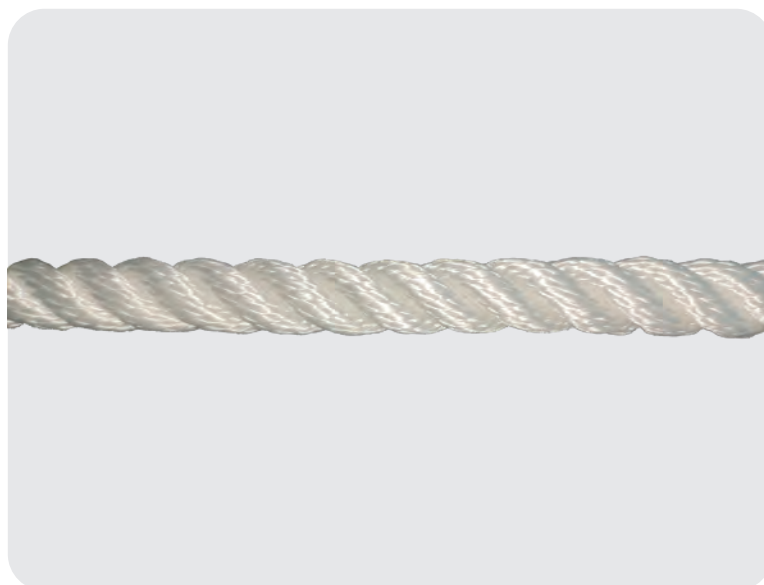

Feature

- 100% nylon (Polyamide)
- 3 strand twisted, classic structure for mooring rope
- Packed in reel

White	Dia. mm	Break Load	Length.m
TFTR01008W	8	1280 kg	200
TFTR01010W	10	1940 kg	200
TFTR01012W	12	2750 kg	200
TFTR01014W	14	3670 kg	200
TFTR01016W	16	4590 kg	100
TFTR01018W	18	5780 kg	100
TFTR01020W	20	7340 kg	100
TFTR01024W	24	10300 kg	100

Black	Dia. mm	Break Load	Length.m
TFTR01008B	8	1280 kg	200
TFTR01010B	10	1940 kg	200
TFTR01012B	12	2750 kg	200
TFTR01014B	14	3670 kg	200
TFTR01016B	16	4590 kg	100
TFTR01018B	18	5780 kg	100
TFTR01020B	20	7340 kg	100
TFTR01024B	24	10300 kg	100

Navy	Dia. mm	Break Load	Length.m
TFTR01008N	8	1280 kg	200
TFTR01010N	10	1940 kg	200
TFTR01012N	12	2750 kg	200
TFTR01014N	14	3670 kg	200
TFTR01016N	16	4590 kg	100
TFTR01018N	18	5780 kg	100
TFTR01020N	20	7340 kg	100
TFTR01024N	24	10300 kg	100

Grey	Dia. mm	Break Load	Length.m
TFTR01008G	8	1280 kg	200
TFTR01010G	10	1940 kg	200
TFTR01012G	12	2750 kg	200
TFTR01014G	14	3670 kg	200
TFTR01016G	16	4590 kg	100
TFTR01018G	18	5780 kg	100
TFTR01020G	20	7340 kg	100
TFTR01024G	24	10300 kg	100

NYLON 8 PLAIT ROPE



Feature

100% nylon (Polyamide)

8 plait braid, classic structure for mooring rope


Packed in reel

White	Dia. mm	Break Load	Weight/m	Length m
TFBR05012W	12	2750 kg	89 g	200
TFBR05014W	14	3670 kg	123 g	200
TFBR05016W	16	4590 kg	159 g	100
TFBR05018W	18	5780 kg	200 g	100
TFBR05020W	20	7340 kg	246 g	100
TFBR05024W	24	10300 kg	355 g	100

Black	Dia. mm	Break Load	Weight/m	Length m
TFBR05012B	12	2750 kg	89 g	200
TFBR05014B	14	3670 kg	123 g	200
TFBR05016B	16	4590 kg	159 g	100
TFBR05018B	18	5780 kg	200 g	100
TFBR05020B	20	7340 kg	246 g	100
TFBR05024B	24	10300 kg	355 g	100

Navy	Dia. mm	Break Load	Weight/m	Length m
TFBR05012N	12	2750 kg	89 g	200
TFBR05014N	14	3670 kg	123 g	200
TFBR05016N	16	4590 kg	159 g	100
TFBR05018N	18	5780 kg	200 g	100
TFBR05020N	20	7340 kg	246 g	100
TFBR05024N	24	10300 kg	355 g	100

NYLON DOUBLE BRAIDED ROPE

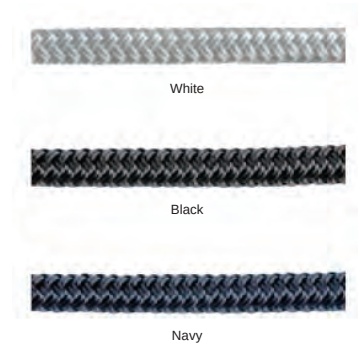

Feature

Core: 100% nylon (Polyamide),
8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"
Cover: 100% nylon (Polyamide),
16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"
Packed in reel


White	Dia. mm	Break Load	Weight/m	Length m
TFBR01008W	8	1280 kg	40 g	200
TFBR01010W	10	1940 kg	62 g	200
TFBR01012W	12	2750 kg	89 g	200
TFBR01014W	14	3670 kg	123 g	200
TFBR01016W	16	4590 kg	159 g	100
TFBR01018W	18	5780 kg	200 g	100
TFBR01020W	20	7340 kg	246 g	100
TFBR01024W	24	10300 kg	355 g	100

Black	Dia. mm	Break Load	Weight/m	Length m
TFBR01008B	8	1280 kg	40 g	200
TFBR01010B	10	1940 kg	62 g	200
TFBR01012B	12	2750 kg	89 g	200
TFBR01014B	14	3670 kg	123 g	200
TFBR01016B	16	4590 kg	159 g	100
TFBR01018B	18	5780 kg	200 g	100
TFBR01020B	20	7340 kg	246 g	100
TFBR01024B	24	10300 kg	355 g	100

White/Gold	Dia. mm	Break Load	Weight/m	Length m
TFBR01008G	8	1280 kg	40 g	200
TFBR01010G	10	1940 kg	62 g	200
TFBR01012G	12	2750 kg	89 g	200
TFBR01014G	14	3670 kg	123 g	200
TFBR01016G	16	4590 kg	159 g	100
TFBR01018G	18	5780 kg	200 g	100
TFBR01020G	20	7340 kg	246 g	100
TFBR01024G	24	10300 kg	355 g	100

Blue	Dia. mm	Break Load	Weight/m	Length m
TFBR01008BL	8	1280 kg	40 g	200
TFBR01010BL	10	1940 kg	62 g	200
TFBR01012BL	12	2750 kg	89 g	200
TFBR01014BL	14	3670 kg	123 g	200
TFBR01016BL	16	4590 kg	159 g	100
TFBR01018BL	18	5780 kg	200 g	100
TFBR01020BL	20	7340 kg	246 g	100
TFBR01024BL	24	10300 kg	355 g	100

POLYESTER 3 STRAND TWISTED ROPE

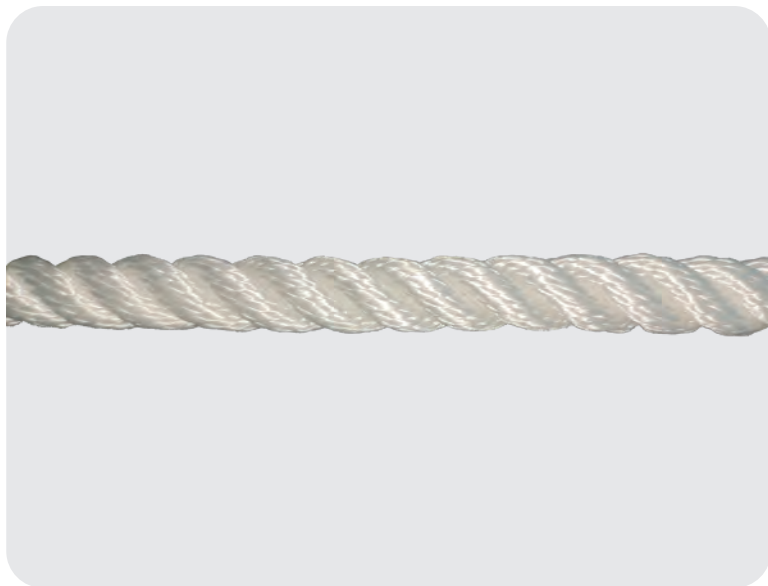

White



Black



Navy



Grey

Feature

100% Polyester

3 strand twisted, classic structure for mooring rope

Packed in reel

White	Dia. mm	Break Load	Length
TFTR02008W	8	1020 kg	200m
TFTR02010W	10	1590 kg	200m
TFTR02012W	12	2270 kg	200m
TFTR02014W	14	3180 kg	200m
TFTR02016W	16	4100 kg	100m
TFTR02018W	18	5150 kg	100m
TFTR02020W	20	6400 kg	100m
TFTR02024W	24	9100 kg	100m

Black	Dia. mm	Break Load	Length
TFTR02008B	8	1020 kg	200m
TFTR02010B	10	1590 kg	200m
TFTR02012B	12	2270 kg	200m
TFTR02014B	14	3180 kg	200m
TFTR02016B	16	4100 kg	100m
TFTR02018B	18	5150 kg	100m
TFTR02020B	20	6400 kg	100m
TFTR02024B	24	9100 kg	100m

Navy	Dia. mm	Break Load	Length
TFTR02008N	8	1020 kg	200m
TFTR02010N	10	1590 kg	200m
TFTR02012N	12	2270 kg	200m
TFTR02014N	14	3180 kg	200m
TFTR02016N	16	4100 kg	100m
TFTR02018N	18	5150 kg	100m
TFTR02020N	20	6400 kg	100m
TFTR02024N	24	9100 kg	100m

Grey	Dia. mm	Break Load	Length
TFTR02008G	8	1020 kg	200m
TFTR02010G	10	1590 kg	200m
TFTR02012G	12	2270 kg	200m
TFTR02014G	14	3180 kg	200m
TFTR02016G	16	4100 kg	100m
TFTR02018G	18	5150 kg	100m
TFTR02020G	20	6400 kg	100m
TFTR02024G	24	9100 kg	100m

POLYESTER 8 PLAIT ROPE



Feature

100% Polyester

8 plait braid, classic structure for mooring rope


Packed in reel

White	Dia. mm	Break Load	Weight/m	Length m
TFBR06012W	12	2270 kg	110 g	200
TFBR06014W	14	3180 kg	148 g	200
TFBR06016W	16	4100 kg	196 g	100
TFBR06018W	18	5150 kg	246 g	100
TFBR06020W	20	6400 kg	305 g	100
TFBR06024W	24	9100 kg	436 g	100

Black	Dia. mm	Break Load	Weight/m	Length m
TFBR06012B	12	2270 kg	110 g	200
TFBR06014B	14	3180 kg	148 g	200
TFBR06016B	16	4100 kg	196 g	100
TFBR06018B	18	5150 kg	246 g	100
TFBR06020B	20	6400 kg	305 g	100
TFBR06024B	24	9100 kg	436 g	100

Navy	Dia. mm	Break Load	Weight/m	Length m
TFBR06012N	12	2270 kg	110 g	200
TFBR06014N	14	3180 kg	148 g	200
TFBR06016N	16	4100 kg	196 g	100
TFBR06018N	18	5150 kg	246 g	100
TFBR06020N	20	6400 kg	305 g	100
TFBR06024N	24	9100 kg	436 g	100

POLYESTER DOUBLE BRAIDED ROPE

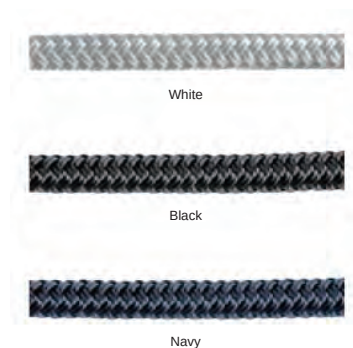

Feature

Core: 100% Polyester

8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"

Cover: 100% Polyester

16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"

Packed in reel

White	Dia. mm	Break Load	Weight/m	Length m
TFBR02008W	8	1020 kg	48 g	200
TFBR02010W	10	1590 kg	76 g	200
TFBR02012W	12	2270 kg	110 g	200
TFBR02014W	14	3180 kg	148 g	200
TFBR02016W	16	4100 kg	196 g	100
TFBR02018W	18	5150 kg	246 g	100
TFBR02020W	20	6400 kg	305 g	100
TFBR02024W	24	9100 kg	436 g	100

Black	Dia. mm	Break Load	Weight/m	Length m
TFBR02008B	8	1020 kg	48 g	200
TFBR02010B	10	1590 kg	76 g	200
TFBR02012B	12	2270 kg	110 g	200
TFBR02014B	14	3180 kg	148 g	200
TFBR02016B	16	4100 kg	196 g	100
TFBR02018B	18	5150 kg	246 g	100
TFBR02020B	20	6400 kg	305 g	100
TFBR02024B	24	9100 kg	436 g	100

Navy	Dia. mm	Break Load	Weight/m	Length m
TFBR02008N	8	1020 kg	48 g	200
TFBR02010N	10	1590 kg	76 g	200
TFBR02012N	12	2270 kg	110 g	200
TFBR02014N	14	3180 kg	148 g	200
TFBR02016N	16	4100 kg	196 g	100
TFBR02018N	18	5150 kg	246 g	100
TFBR02020N	20	6400 kg	305 g	100
TFBR02024N	24	9100 kg	436 g	100

Prespliced Anchor Rode

NYLON 3 STRAND TWISTED ANCHOR RODE



Feature

Rope is 100% nylon (Polyamide)

3 strand twisted, classic structure for mooring rope

With Calibrated Chain on the end

Code	Rope type	Rope Dia.	Rope Length	Chain type	Chain Size	Chain Length
TFAR0112150W	3 strand	1/2"	150'	ISO4565	1/4"	15'
TFAR0112200W	3 strand	1/2"	200'	ISO4565	1/4"	15'
TFAR0112250W	3 strand	1/2"	250'	ISO4565	1/4"	15'
TFAR01916150W	3 strand	9/16"	150'	ISO4565	5/16"	20'
TFAR01916200W	3 strand	9/16"	200'	ISO4565	5/16"	20'
TFAR01916250W	3 strand	9/16"	250'	ISO4565	5/16"	20'
TFAR0158150W	3 strand	5/8"	150'	ISO4565	3/8"	20'
TFAR0158200W	3 strand	5/8"	200'	ISO4565	3/8"	20'
TFAR0158250W	3 strand	5/8"	250'	ISO4565	3/8"	20'

NYLON DOUBLE BRAID ANCHOR RODE



Feature

Rope Core: 100% nylon (Polyamide),
8 strand braid for rope 3/8" and 1/2", 12 strand braid for rope 5/8"
Rope Cover: 100% nylon (Polyamide),
16 strand double braid for 3/8" and 1/2", 24 strand double braid for 5/8"
With Calibrated Chain on the end

Code	Rope type	Rope Dia.	Rope Length	Chain type	Chain Size	Chain Length
TFAR0212150W	Double braid	1/2"	150'	ISO4565	1/4"	15'
TFAR0212200W	Double braid	1/2"	200'	ISO4565	1/4"	15'
TFAR0212250W	Double braid	1/2"	250'	ISO4565	1/4"	15'
TFAR02916150W	Double braid	9/16"	150'	ISO4565	5/16"	20'
TFAR02916200W	Double braid	9/16"	200'	ISO4565	5/16"	20'
TFAR02916250W	Double braid	9/16"	250'	ISO4565	5/16"	20'
TFAR0258150W	Double braid	5/8"	150'	ISO4565	3/8"	20'
TFAR0258200W	Double braid	5/8"	200'	ISO4565	3/8"	20'
TFAR0258250W	Double braid	5/8"	250'	ISO4565	3/8"	20'

POLYESTER 3 STRAND TWISTED ANCHOR RODE



Feature

- Rope is 100% Polyester
- 3 strand twisted, classic structure for mooring rope
- With Calibrated Chain on the end

Code	Rope type	Rope Dia.	Rope Length	Chain type	Chain Size	Chain Length
TFAR031245W	3 strand	12mm	45m	DIN766	6mm	4.5m
TFAR031260W	3 strand	12mm	60m	DIN766	6mm	4.5m
TFAR031275W	3 strand	12mm	75m	DIN766	6mm	4.5m
TFAR031445W	3 strand	14mm	45m	DIN766	8mm	6m
TFAR031460W	3 strand	14mm	60m	DIN766	8mm	6m
TFAR031475W	3 strand	14mm	75m	DIN766	8mm	6m
TFAR031645W	3 strand	16mm	45m	DIN766	10mm	6m
TFAR031660W	3 strand	16mm	60m	DIN766	10mm	6m
TFAR031675W	3 strand	16mm	75m	DIN766	10mm	6m



POLYESTER DOUBLE BRAID ANCHOR RODE



Feature

Rope Core: 100% Polyester

8 strand braid for rope 12mm, 12 strand braid for rope 14mm and 16mm

Rope Cover: 100% Polyester

16 strand double braid for 12mm, 24 strand double braid for 14mm and 16mm

With Calibrated Chain on the end

Code	Rope type	Rope Dia.	Rope Length	Chain type	Chain Size	Chain Length
TFAR041245W	Double Braid	12mm	45m	DIN766	6mm	4.5m
TFAR041260W	Double Braid	12mm	60m	DIN766	6mm	4.5m
TFAR041275W	Double Braid	12mm	75m	DIN766	6mm	4.5m
TFAR041445W	Double Braid	14mm	45m	DIN766	8mm	6m
TFAR041460W	Double Braid	14mm	60m	DIN766	8mm	6m
TFAR041475W	Double Braid	14mm	75m	DIN766	8mm	6m
TFAR041645W	Double Braid	16mm	45m	DIN766	10mm	6m
TFAR041660W	Double Braid	16mm	60m	DIN766	10mm	6m
TFAR041675W	Double Braid	16mm	75m	DIN766	10mm	6m

Prespliced Fender Line

POLYESTER DOUBLE BRAIDED FENDER LINE



Feature

Core: 100% Polyester

8 strand braid for rope 8mm and 10mm

Cover: 100% Polyester

16 strand double braid for 8mm and 10mm

Prespliced rope eye on one end 10cm

White	Dia. Mm	Break Load	Weight/m	Length m
TFFL03008W	8	1020 kg	48 g	2 m
TFFL03010W	10	1590 kg	76 g	2 m

Black	Dia. Mm	Break Load	Weight/m	Length m
TFFL03008B	8	1020 kg	48 g	2 m
TFFL03010B	10	1590 kg	76 g	2 m

Navy	Dia. Mm	Break Load	Weight/m	Length m
TFFL03008N	8	1020 kg	48 g	2 m
TFFL03010N	10	1590 kg	76 g	2 m

Blue	Dia. Mm	Break Load	Weight/m	Length m
TFFL03008BL	8	1020 kg	48 g	2 m
TFFL03010BL	10	1590 kg	76 g	2 m

Rope For Sail Boat (Hayard And Sheets)

HMWPE 12 STRAND BRAIDED ROPE



Properties

- Material: UHMWPE
- Construction: 12 strand braided, hollow core
- Treatment: Marine coating finish for offshore use
- Specific Density: 0.975 (Floats)
- Temperature resistance: 70°C max continuous
- Melting Point: 145°C
- Abrasion Resistance: Excellent
- UV Protection: Excellent - UP Factor 40+
- Dry & wet conditions: wet strength = dry strength
- Elongation at 50% of breaking load: 3.4%
- Spliced strength: ±10%
- Weight and length tolerance: ±5%
- Minimum Breaking Load: Conforms to ISO 2307

Feature

1. super strong, widely used in the field of aeronautical and marine applications.
2. recommended for use as lifelines on coastal and offshore sailing boats. It is easy to splice and tie into various marine knots.
3. coated with a waxy finish to reduce both abrasion and UV radiation, as well as facilitates comfortable handling. It is extremely safe to use under load as there is limited backlash energy.

Blue	Dia. Mm	Break Load	Length m
TFDR0102BL	2	400 kg	100 m
TFDR0103BL	3	800kg	100 m
TFDR0104BL	4	1300kg	100 m
TFDR0105BL	5	2300kg	100 m
TFDR0106BL	6	3000kg	100 m
TFDR0108BL	8	5000kg	100 m
TFDR0110BL	10	8000kg	100 m
TFDR0112BL	12	11500kg	100 m


Grey	Dia. Mm	Break Load	Length m
TFDR0102GY	2	400 kg	100 m
TFDR0103GY	3	800kg	100 m
TFDR0104GY	4	1300kg	100 m
TFDR0105GY	5	2300kg	100 m
TFDR0106GY	6	3000kg	100 m
TFDR0108GY	8	5000kg	100 m
TFDR0110GY	10	8000kg	100 m
TFDR0112GY	12	11500kg	100 m

Green	Dia. Mm	Break Load	Length m
TFDR0102GN	2	400 kg	100 m
TFDR0103GN	3	800kg	100 m
TFDR0104GN	4	1300kg	100 m
TFDR0105GN	5	2300kg	100 m
TFDR0106GN	6	3000kg	100 m
TFDR0108GN	8	5000kg	100 m
TFDR0110GN	10	8000kg	100 m
TFDR0112GN	12	11500kg	100 m

Red	Dia. Mm	Break Load	Length m
TFDR0102RD	2	400 kg	100 m
TFDR0103RD	3	800kg	100 m
TFDR0104RD	4	1300kg	100 m
TFDR0105RD	5	2300kg	100 m
TFDR0106RD	6	3000kg	100 m
TFDR0108RD	8	5000kg	100 m
TFDR0110RD	10	8000kg	100 m
TFDR0112RD	12	11500kg	100 m

Black	Dia. Mm	Break Load	Length m
TFDR0102BK	2	400 kg	100 m
TFDR0103BK	3	800kg	100 m
TFDR0104BK	4	1300kg	100 m
TFDR0105BK	5	2300kg	100 m
TFDR0106BK	6	3000kg	100 m
TFDR0108BK	8	5000kg	100 m
TFDR0110BK	10	8000kg	100 m
TFDR0112BK	12	11500kg	100 m

POLYESTER DOUBLE BRAID ROPE WITH HMWPE CORE

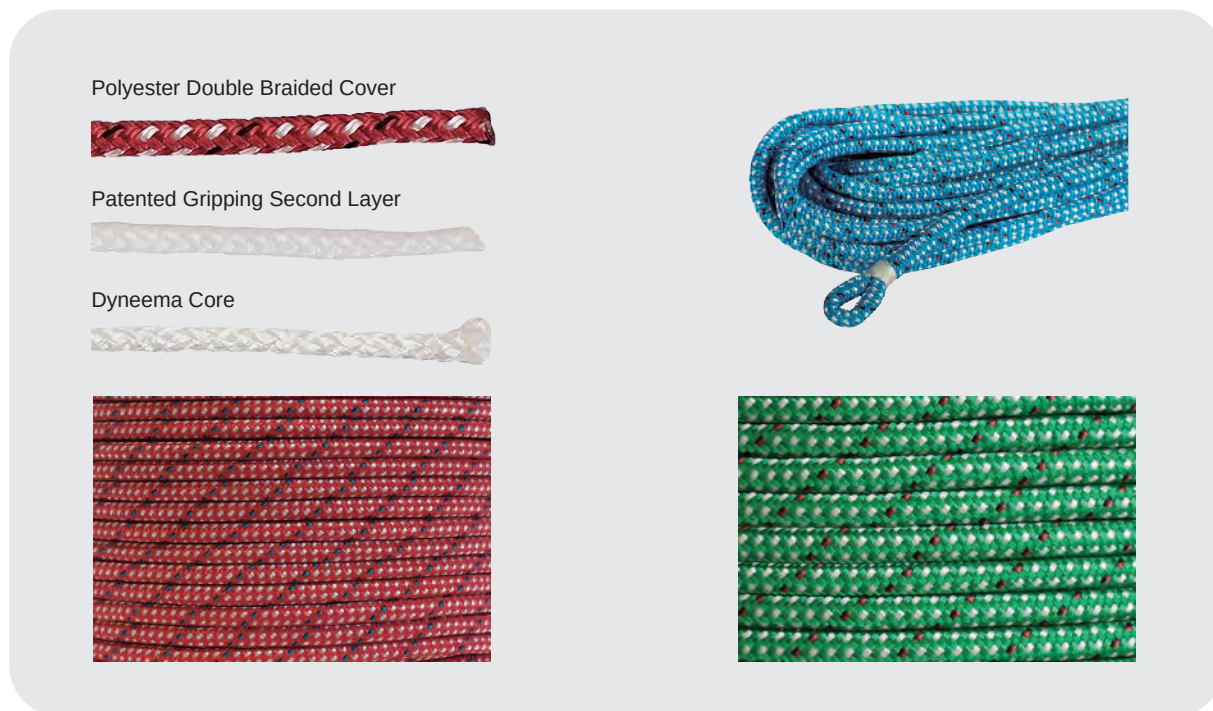

Feature

1. Proceans' halyards are made from a braided core (UHMWPE) then covered in a patented material which grips the two layers of braided polyester with the super strong core.
2. This unique layer prevents slipping. The material will still grip the core and outer layers even when stripped to reduce weight etc.
3. They are ideal replacements for headsail and main halyards and premium sheets. They are easy to winch and soft to touch.

Properties

- High Strength: On a weight for weight basis, UHMWPE is 15 times stronger than steel wire
- Light Weight: Size for size, UHMWPE is 8 times lighter than steel wire.
- Unique patented layer to grip core and cover.
- Water Resistant: UHMWPE is hydrophobic and does not absorb water, remaining dry when working in wet conditions
- Chemical Resistant: UHMWPE is chemically inert, and performs well in dry, wet, salty and tropical conditions
- UV Resistant: UHMWPE has excellent UV resistance (SPF 40)
- Core Material: UHMWPE
- Cover Material: The cover is made of a hardwearing, double braided polyester which protects the core from abrasion and UV radiation (SPF 50)
- End Termination: Melted end
- Spliceable: Can be spliced with a double braid splice
- Strippable: Can be stripped for added weight savings
- Feel: Smooth and simple to handle/winch

Blue with Fleck	Dia. Mm	Break Load	Length m
TFSL0108BL	8	2000kg	100 m
TFSL0110BL	10	3000kg	100 m
TFSL0112BL	12	4500kg	100 m

Green with Fleck	Dia. Mm	Break Load	Length m
TFSL0108GN	8	2000kg	100 m
TFSL0110GN	10	3000kg	100 m
TFSL0112GN	12	4500kg	100 m

Red with Fleck	Dia. Mm	Break Load	Length m
TFSL0108RD	8	2000kg	100 m
TFSL0110RD	10	3000kg	100 m
TFSL0112RD	12	4500kg	100 m

Yellow with Fleck	Dia. Mm	Break Load	Length m
TFSL0108YW	8	2000kg	100 m
TFSL0110YW	10	3000kg	100 m
TFSL0112YW	12	4500kg	100 m

Black with Fleck	Dia. Mm	Break Load	Length m
TFSL0108BK	8	2000kg	100 m
TFSL0110BK	10	3000kg	100 m
TFSL0112BK	12	4500kg	100 m

POLYESTER DOUBLE BRAID ROPE WITH HMWPE CORE

32 Braid Polyester Cover



Patented Heavy Duty UHMWPE Core



Feature

1. High performance double braided polyester is suitable for all applications where low stretch and low creep is essential such as highspeed winching, halyards and sheets.

2. Proceans high performance ropes have a unique, patented high strength UHMWPE core which grips both layers together preventing slip or stretch.

3. All rope components are manufactured on high speed, imported European braiding equipment using A grade filaments. Each filament shipment is multi-checked against standard for:

- Weight
- Lineal strength
- Twist strength
- Melting temperature
- Moisture resistance
- UV resistance

Quality assurance is performed on finished ropes by batch to ensure breaking strains meet published standards.

Proceans high performance polyester double braided rope:

- A single core of patented, non slip, hollow braided white UHMWPE filament. The core quality is paramount to the breaking strength.
- A cover layer which increases the handling, twist minimization and abrasion/UV resistance quality of the rope.
- Excellent knotability
- Complies with British Standard BS 1891:1998 and European Standard EN 1891 for low stretch kernmantel ropes.
- Low stretch
- Low creep - 4 X 24 braid cover.
- High UV rating
- Excellent abrasion resistance
- Rot, mildew and chemical resistant
- Soft feel

Blue and White	Dia. Mm	Break Load	Length m
TFSL0208BL	8	2400kg	100 m
TFSL0210BL	10	3600kg	100 m
TFSL0212BL	12	5400kg	100 m


Green and White	Dia. Mm	Break Load	Length m
TFSL0208GN	8	2400kg	100 m
TFSL0210GN	10	3600kg	100 m
TFSL0212GN	12	5400kg	100 m

Red and White	Dia. Mm	Break Load	Length m
TFSL0208RD	8	2400kg	100 m
TFSL0210RD	10	3600kg	100 m
TFSL0212RD	12	5400kg	100 m

Yellow and White	Dia. Mm	Break Load	Length m
TFSL0208YW	8	2400kg	100 m
TFSL0210YW	10	3600kg	100 m
TFSL0212YW	12	5400kg	100 m

Black and White	Dia. Mm	Break Load	Length m
TFSL0208BK	8	2400kg	100 m
TFSL0210BK	10	3600kg	100 m
TFSL0212BK	12	5400kg	100 m

POLYESTER DOUBLE BRAIDED ROPE WITH BRAID POLYESTER CORE

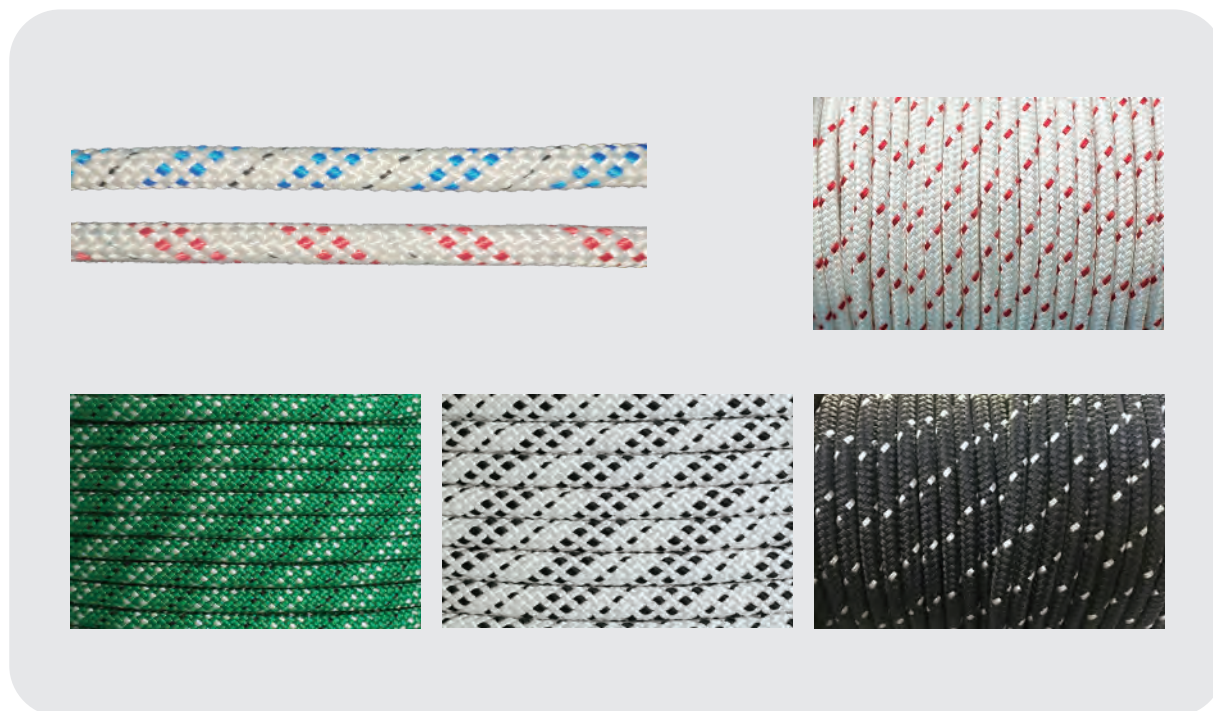

Feature

Double braided polyester is suitable for sailing sheets, fender lines and mooring/docking lines. It is also suitable for general purpose use where hand feel is required.

All rope components are manufactured on high speed, imported European braiding equipment using A grade filaments. Each filament shipment is multi-checked against standard for:

- Weight
- Lineal strength
- Twist strength
- Melting temperature
- Moisture resistance
- UV resistance

Quality assurance is performed on finished ropes by batch to ensure breaking strains meet published standards.

Proceans polyester double diamond braided rope has:

- A single core of hollow braided white polyester filament with an outer diamond braid cover (a rope within a rope, hence the expression double braided). The core quality is paramount to the breaking strength which it shares with the cover. The cover increases the handling, twist minimization and abrasion/UV resistance quality of the rope.
- 25% less elasticity than nylon rope
- High UV rating
- Excellent abrasion resistance
- Rot, mildew and chemical resistant
- Polyester has a soft silky feel
- Polyester rope does not float

The number of braids in the outer core refers to the design of the diamond pattern. The more weaves in the outer braid the stiffer the rope. For example a 10mm normal performance rope has 2 X 16 braids while a 10mm high performance rope has 4 X 24 braids.

Blue with Fleck	Dia. Mm	Break Load	Length m
TFSL0306BL	6	700	100 m
TFSL0308BL	8	1000	100 m
TFSL0310BL	10	1800	100 m
TFSL0312BL	12	2000	100 m

Green with Fleck	Dia. Mm	Break Load	Length m
TFSL0306GN	6	700	100 m
TFSL0308GN	8	1000	100 m
TFSL0310GN	10	1800	100 m
TFSL0312GN	12	2000	100 m

Red with Fleck	Dia. Mm	Break Load	Length m
TFSL0306RD	6	700	100 m
TFSL0308RD	8	1000	100 m
TFSL0310RD	10	1800	100 m
TFSL0312RD	12	2000	100 m

Yellow with Fleck	Dia. Mm	Break Load	Length m
TFSL0306YW	6	700	100 m
TFSL0308YW	8	1000	100 m
TFSL0310YW	10	1800	100 m
TFSL0312YW	12	2000	100 m

Black with Fleck	Dia. Mm	Break Load	Length m
TFSL0306BK	6	700	100 m
TFSL0308BK	8	1000	100 m
TFSL0310BK	10	1800	100 m
TFSL0312BK	12	2000	100 m

Rope For Trailer

OFF ROAD RECOVERY ROPE



Feature

Material: Nylon

- Elongation: >30%
- Much safer than steel if the line breaks due to overloading
- Easy to handle and use - no metal splinters
- Polyurthethane coated eyes for protection and added

Red	Dia. inch	Dia. mm	Length inch	Length mm	Break Load
TFRR1906RD	3/4"	19mm	20'	6m	8626kg
TFRR2206RD	7/8"	22mm	20'	6m	12980kg
TFRR2209RD	7/8"	22mm	30'	9m	12980kg
TFRR2506RD	1"	25mm	20'	6m	15160kg
TFRR2509RD	1"	25mm	30'	9m	15160kg
TFRR3209RD	1-1/4"	32mm	30'	9m	23740kg

Black	Dia. inch	Dia. mm	Length inch	Length mm	Break Load
TFRR1906BK	3/4"	19mm	20'	6m	8626kg
TFRR2206BK	7/8"	22mm	20'	6m	12980kg
TFRR2209BK	7/8"	22mm	30'	9m	12980kg
TFRR2506BK	1"	25mm	20'	6m	15160kg
TFRR2509BK	1"	25mm	30'	9m	15160kg
TFRR3209BK	1-1/4"	32mm	30'	9m	23740kg

HMWPE SOFT SHACKLE



Feature

The rope shackle is a perfect replacement for traditional mental snap shackles and crew shackles. The soft shackle needs no tools and is easy to open and close.

Red	Dia. inch	Dia. mm	Eye inch	Eye mm	Break Load
TFSS0510R	3/16"	5 mm	4"	10 cm	2200kg
TFSS0610R	1/4"	6 mm	4"	10 cm	3500kg
TFSS0810R	5/16"	8mm	4"	10 cm	5500kg
TFSS1015R	3/8"	10mm	6"	15 cm	8100kg
TFSS1212R	1/2"	12mm	6"	15 cm	11000kg
TFSS1420R	9/16"	14mm	8"	20 cm	14000kg

Green	Dia. inch	Dia. mm	Eye inch	Eye mm	Break Load
TFSS0510G	3/16"	5 mm	4"	10 cm	2200kg
TFSS0610G	1/4"	6 mm	4"	10 cm	3500kg
TFSS0810G	5/16"	8mm	4"	10 cm	5500kg
TFSS1015G	3/8"	10mm	6"	15 cm	8100kg
TFSS1212G	1/2"	12mm	6"	15 cm	11000kg
TFSS1420G	9/16"	14mm	8"	20 cm	14000kg

Yellow	Dia. inch	Dia. mm	Eye inch	Eye mm	Break Load
TFSS0510Y	3/16"	5 mm	4"	10 cm	2200kg
TFSS0610Y	1/4"	6 mm	4"	10 cm	3500kg
TFSS0810Y	5/16"	8mm	4"	10 cm	5500kg
TFSS1015Y	3/8"	10mm	6"	15 cm	8100kg
TFSS1212Y	1/2"	12mm	6"	15 cm	11000kg
TFSS1420Y	9/16"	14mm	8"	20 cm	14000kg

Blue	Dia. inch	Dia. mm	Eye inch	Eye mm	Break Load
TFSS0510B	3/16"	5 mm	4"	10 cm	2200kg
TFSS0610B	1/4"	6 mm	4"	10 cm	3500kg
TFSS0810B	5/16"	8mm	4"	10 cm	5500kg
TFSS1015B	3/8"	10mm	6"	15 cm	8100kg
TFSS1212B	1/2"	12mm	6"	15 cm	11000kg
TFSS1420B	9/16"	14mm	8"	20 cm	14000kg

Mooring Spring

AISI 304 STAINLESS STEEL MOORING SPRING



Code	Dia. mm	Length mm
TFYH9906	5	270
TFYH9908	6	320
TFYH9911	7	320
TFYH0102	7	255
TFYH9912	8	320
TFYH9914	9	410
TFYH0103	9	300
TFYH9915	10	390
TFYH9916	11	390

AISI 304 STAINLESS STEEL MOORING SPRING



Code	Dia. mm	Length mm
TFYH0555	4	170

AISI 304 STAINLESS STEEL MOORING SPRING



Code	Dia. mm	Length mm
TFYH0206	5	340
TFYH0208	6	365
TFYH0211	7	395
TFYH0214	9	460
TFYH0215	11	460
TFYH0216	12	460

Boat Hook

ALUMINIUM BOOT HOOK



Code	Dia. mm	L. mm
TF290001	25	130
TF290002	25	160
TF290003	25	180
TF290004	25	210

ALUMINIUM HOOK TELESCOPIC



Code	Dia. mm	L. mm
TF290011	25/30	60-100
TF290012	25/30	120-210

ALUMINIUM BOOT HOOK TELESCOPIC "COLOUR"



Code	Dia. mm	L. mm	Colour
TF290021	25/30	120-210	White
TF290022	25/30	120-210	Blue
TF290023	25/30	120-210	Red

ALUMINIUM BOOT HOOK THREE-TELESCOPIC



Code	Dia. mm	L. mm
TF290031	25/30/25	130-240